

2K x 2K Dummy Monitor GF VT DM




The DVI dummy monitor is passive, and connects to a DVI graphics port, providing the graphics card with an EDID table and continuous monitor present feedback. The device enables the remote monitoring and control of widely distributed Servers or desktop computers without the need for a local monitor. It is fully VESA compliant and enables the creation of monitor visuals on any Desktop or Server.

The device is fully compatible with all remote viewing and control applications and provides an EDID table for all VESA standard monitors as well as custom resolutions including 2048 x 2048.

Specification

- No power supply.
- Continuous "monitor present" feedback to host graphics card.
- Fully VESA compliant, includes 2048 x 2048.
- For custom resolutions, please request when ordering.
- Supports dual monitor configurations using splitter cable.
- Silent operation.
- CE, FCC and ROHS class B.

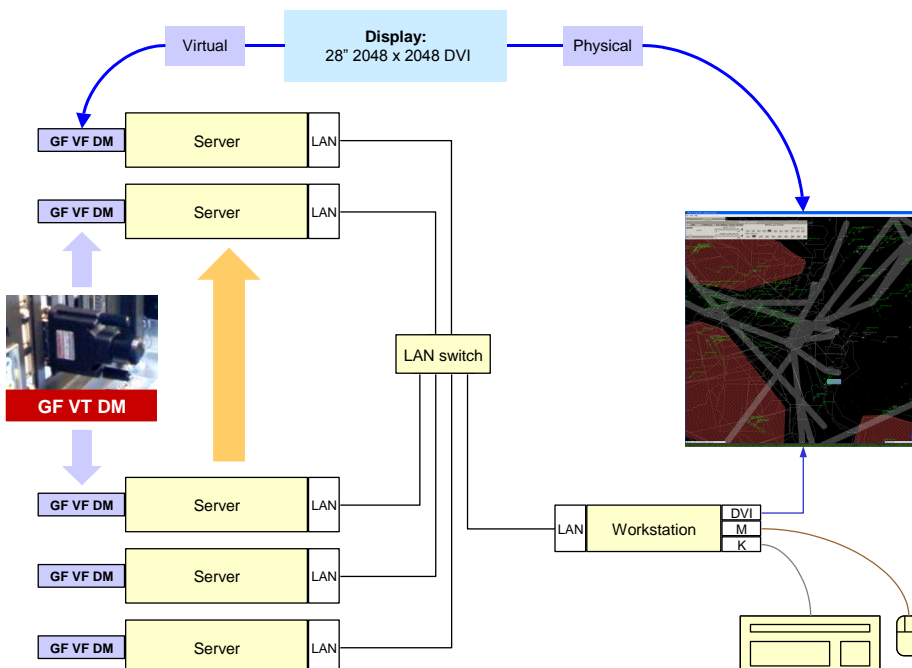

Above: Dual monitor operations may be simulated via a splitter cable.

Left: In this example, the Thruput DVI dummy monitor is deployed to provide remote real time monitoring of 2048 x 2048 Air Traffic Control positions.



2K x 2K Dummy Monitor **GF VT DM**

Thruput Limited
14-15 Londonderry Farm
Keynsham Road, Willsbridge,
Bristol, BS30 6EL, UK

Office: +44 117 932 85 85
Fax: +44 117 932 93 39
Web: <http://www.thruput.co.uk/>
Email: sales@thruput.co.uk

Thruput Limited operate a policy of continuous improvement and information in this document is subject to change without notice and does not constitute an Offer or a Warranty of any kind.

Author: ND
Date: Dec 2013

Page 2 of 2
Ref: GF VT DM DN 1442-0000 V 1.3