




The Thruput GF VT 08, 30" 2560 x 1600 display provides clear and reliable display capability, for deployment in high-density operational areas where heat and noise are carefully managed to provide the optimum working environment.

**Key capabilities include:**

- Clarity.
- Reliability.
- Minimum heat output.
- Minimum power consumption.
- Silence in operation.
- Minimum user controls.

**Specification**

Horizontal resolution	pixels	2560
Vertical resolution	pixels	1600
Horizontal screen size	mm	645
Vertical screen size	mm	405
Diagonal	inches	30
Luminance	Cd/m <sup>2</sup>	400
Contrast ratio		700:1
Input Channel	D	DVI DL
Configuration options	Freestanding, VESA or custom panel	
Noise	0 dB (silent operation)	
Compliance	CE, FCC and ROHS class B	

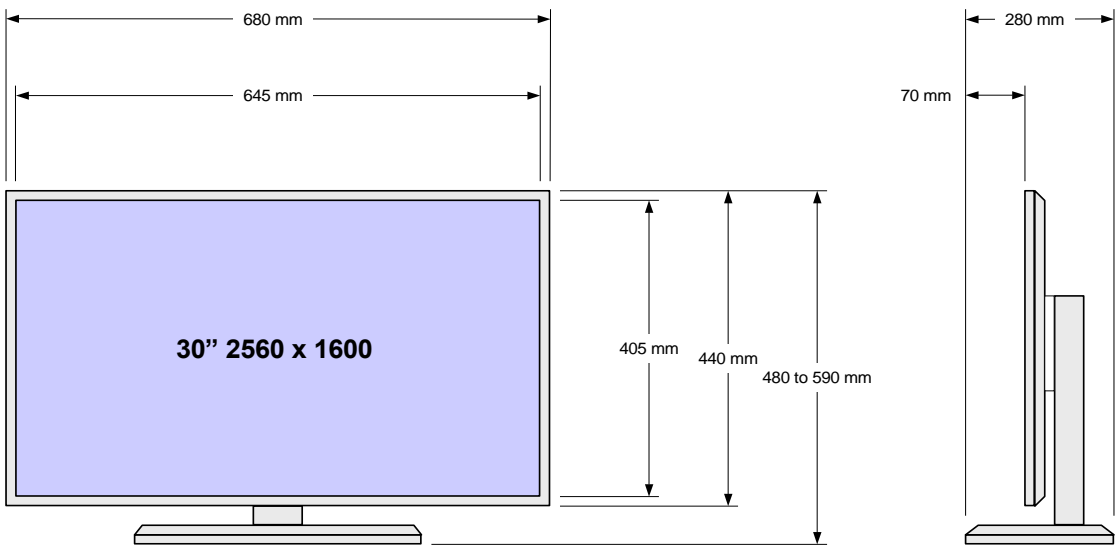

*The GF VT 08 is available in free standing, VESA wall mount and custom panel mount versions.*