

DVI Dummy Monitor.



The Thruput DVI dummy monitor is fully VESA compliant and enables the creation of monitor visuals on any Desktop or Server. The device is fully compatible with all remote viewing and control applications.

The device provides an EDID table for all VESA standard monitors and also provides 2048 x 2048 resolutions.


Thruput Limited DVI Dummy Monitor provides support for the host graphics card with:

- **Digital monitor EDID information.**
- **Continuous monitor attached feedback.**
- **Also supports 2048 x 2048 monitor resolution.**


Device applications

The DVI dummy monitor enables the remote monitoring and control of widely distributed Servers or desktop computers without the need for a local monitor.

The device is passive, and connects at any local DVI graphics port, providing the graphics card with an EDID table and continuous monitor present feedback.

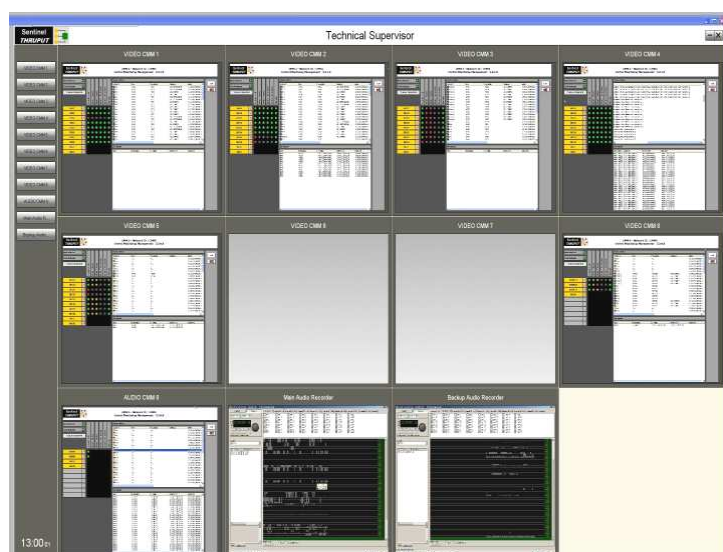

Remote operations

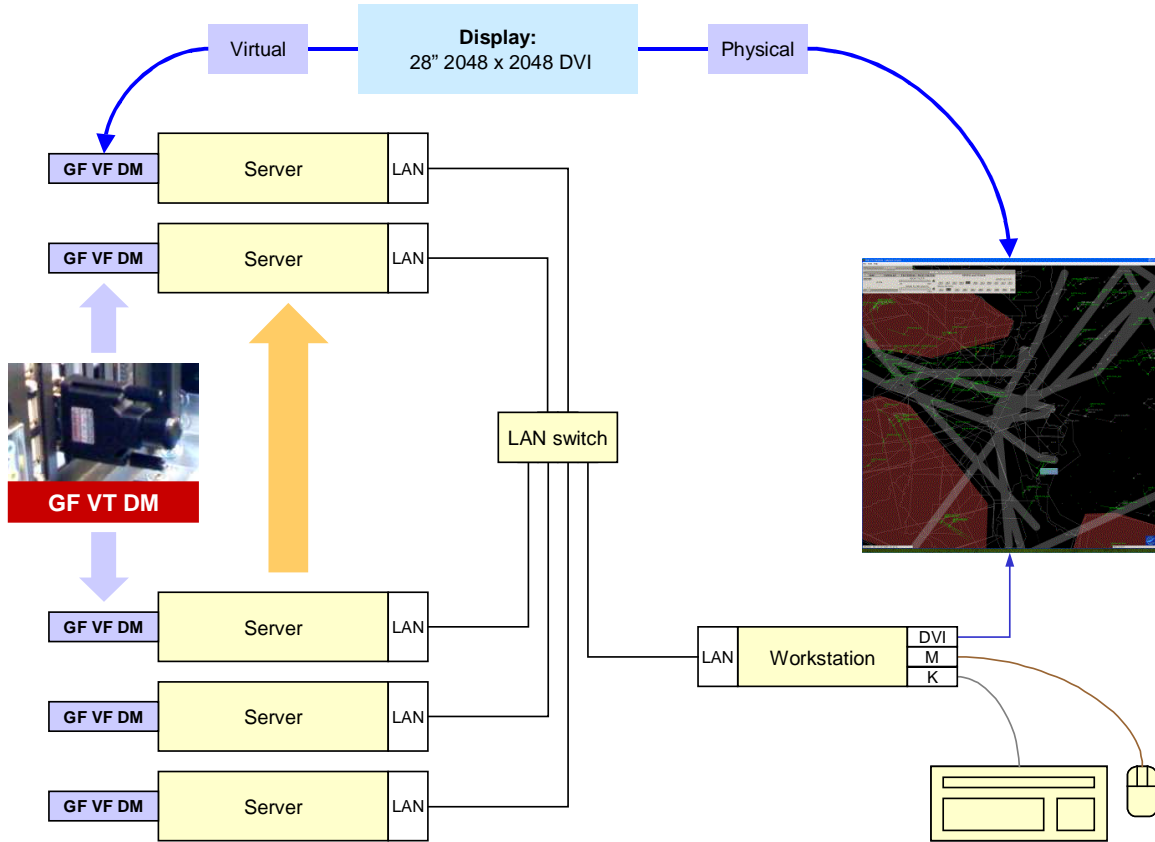

Thruput DVI dummy monitor is deployed at Warsaw ACC to provide remote real time monitoring of 2048 x 2048 Air Traffic Control positions.

Specification

- No power supply.
- Continuous “monitor present” feedback to host graphics card.
- Fully VESA compliant.
- Additional resolutions include 2048 x 2048.
- Supports dual monitor configurations using splitter cable.

Right: Dual monitor operations may be simulated via a splitter cable.

