

## Videomax VI HDMI to DisplayPort Format Converter & Video Switch

Advanced HDMI to DisplayPort format convertor and switch, enables legacy graphics cards to operate the latest generation of flat panel display monitors.



- Up to 3840 x 2160 @ 60 Hz
- All standard HDMI resolutions
- Select any input for output as a DisplayPort video.

### Simplicity


- No software required.
- Plug and play solution.
- Independent of the display screen.
- Independent of the operating system.
- Independent of recording system.
- High reliability.
- Silent operation.

### Safety

- In line Pass through of EDID table.
- All functions performed in real-time and without loss of colour depth.

### Green solution

- Does not use any hazardous materials.
- Fully RoHS compliant.
- Ultra-low power consumption.

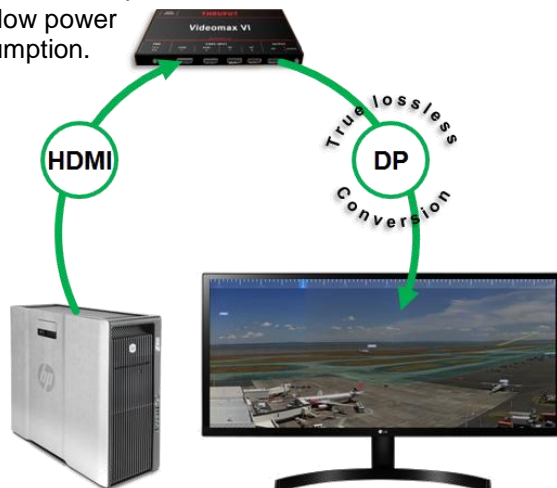

### Specification

Part number	GF VMAX VI	
Inputs	2 x HDMI 2.0 2 x DP 1.0 RS232 control port	
Output	1 x DP 1.2 1 x Audio Jack	
Support	Display	DPCD (DisplayPort Configuration Data)
	Graphics card	EDID (Extended Display Identification Data)
Resolution	HDMI 2.0	Up to: 3840 x 2160 @ 60 Hz
	DP 1.2	Up to: 3840 x 2160 @ 60 Hz
Power Supply	DC	12V 3A rated
Physical	210 (W) x 140 (L) x 22 (H) mm	
Weight:	450 g.	
MTBF	190,000 hours (calculated).	
Noise	0 dB (silent operation).	
Compliance	CE, FCC and ROHS class B.	